

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.


**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/22, H04M 15/12		A2	(11) International Publication Number: WO 98/21907
			(43) International Publication Date: 22 May 1998 (22.05.98)
(21) International Application Number: PCT/SE97/01895 (22) International Filing Date: 11 November 1997 (11.11.97) (30) Priority Data: 08/747,838 13 November 1996 (13.11.96) US (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventor: VEDEL, Peter; Malmvägen 4A, 7 tr., S-191 61 Sollentuna (SE). (74) Agent: TELEFONAKTIEBOLAGET LM ERICSSON; Patent and Trademark Dept., S-126 25 Stockholm (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published Without international search report and to be republished upon receipt of that report.	

(54) Title: SELECTIVE BROADCASTING OF CHARGE RATES

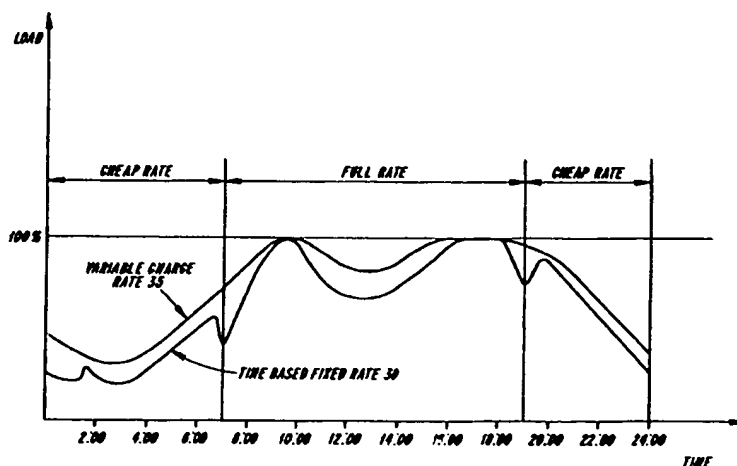

(57) Abstract

A cellular phone system, optimizing user demand by charging system subscribers according to a Variable Charge Rate (VCR) that is based on the price elasticity of the subscribers. According to the present invention, the service provider monitors the load in each cell and, for each cell, the service provider continuously determines a charge rate that can be tailored to specific subscriber category according to a number of variables, offering subscribers a VCR that is optimized for the individual cell's capacity and overall system capacity. According to an exemplary embodiment, subscribers may use mobile stations supporting the Short Message Service (SMS) to provide the subscribers with the broadcast VCR. The system can determine, in real time, optimal VCRs for individual cells to maximize revenue generated by the cell for any time of day. The VCRs may be selectively broadcast to the VCR-mobile station to inform subscribers of the current rate of charge for calls. VCRs may be tailored to specific categories of subscribers to provide better price differentiation between subscribers based on price elasticity of the subscribers categories.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

SELECTIVE BROADCASTING OF CHARGE RATES**BACKGROUND:**

The present invention relates to cellular telephone systems and, in particular, to a method and apparatus for controlling and optimizing the utilization of cellular telephone systems.

A cellular telephone system normally services an area populated by a number of users. Looking at Fig. 1, the service area of the system typically is divided up into cells (C1-C10), each equipped with a base station (BS1-BS10) capable of communicating with a number of users (M1-10) within the cell. Inherently, each cell has a maximum number of users that can be handled simultaneously. This is referred to as the cell's capacity. In addition, the service area containing the cells has an overall capacity. A critical factor which is taken into account in providing cellular telephone service to subscribers is the overall capacity of the system.

A basic problem with designing any cellular system is how much overall and individual cell capacity should be provided to ensure adequate service while maximizing revenues generated from the users of the cellular system. Complicating the design of such a system is the fact that the number of calls, or demand for use of the system, varies dramatically in each cell according to the time of day. On one hand, insufficient capacity during peak hours of system operation will cause congestion, and the inability to provide adequate service to users. On the other hand, providing too much unused capacity during off-hours under utilizes resources that increases overall cost of system operation. Therefore, it is important to optimize the trade-off between adequate capacity to handle

anticipated subscriber demand for the system during peak usage while minimizing the unused capacity during off-hours. The more difficult of these two is how to maximize system usage during the hours when the system's capacity is largely idle.

Various methods and systems have been devised in order to maximize usage of the overall capacity of a cellular system at every time of day. In the past this has been attempted by varying the rate charged to subscribers of the system and its services at different times. For example, during peak hours, such as business hours when demand is at its greatest, all subscribers pay a full rate. However, as subscriber demand decreases, for example, during the evening and weekend hours, rates are reduced in one or more steps in order to encourage increased utilization of the system.

Varying the price is an effective means for regulating system demand because of the price sensitivity of subscribers. Certain subscribers are more price sensitive than others. This is known as a subscriber's price elasticity. For example, a personal use subscriber's price elasticity is much greater than a business use subscriber because, unlike a business use subscriber, a personal use subscriber's need to make a call is usually much less urgent or necessary. As a result, personal use subscribers may delay or make fewer calls for no other reason than the price of the call or because it comes out of their own pocket. Accordingly, personal use subscribers are more likely to be induced to use a system when rates are lower.

Cellular service providers often charge higher rates during the week, especially during working hours, for cellular calls. Because of these higher rates, certain subscribers who would otherwise use the cellular phone system are discouraged from making calls due to

SUMMARY

The present inventor has recognized because subscriber price elasticity does vary, by optimizing price differentiation between subscribers, the service provider can increase revenue and more effectively regulate system capacity.

It is therefore an object of the present invention to improve use of system capacity regardless of time of day without indiscriminately discouraging subscriber service.

It is another object of the invention to improve overall revenue generated by the cellular system through optimized subscriber price differentiation.

It is a further object to provide increased subscriber satisfaction due to increased flexibility of when subscribers can use the system because it is their choice to place a call at a higher rate or wait until a lower rate is broadcast. The rates being adjusted for the category of user.

The foregoing and other objects are accomplished through implementation of a cellular system, providing a user subscription that is charged according to a Variable Charge Rate (VCR) that is based on the price elasticity of the subscribers. According to one embodiment of the present invention, the service provider monitors the load in each cell and, for each cell, the service provider continuously determines a charge rate that can be tailored to specific subscriber groups according to a number of variables, offering subscribers a VCR that is optimized for the individual cell's capacity and overall system capacity. In one embodiment, subscribers may use mobile stations supporting the Short Message Service (SMS) to provide the subscribers with the broadcast VCR (VCR mobile stations). The system can determine, in real time,

optimal VCRs for an individual cell to maximize revenue generated by the cell for any time of the day. The VCRs may be selectively broadcast to VCR-mobile stations to inform subscribers of the current rate of charge for calls. According to an exemplary embodiment of the invention, the VCRs may be tailored to specific categories of subscribers to provide better price differentiation between subscribers based on price elasticity of the subscriber categories.

10

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other features, objects and advantages of the invention will be better understood by reading the following description in conjunction with the drawings, in which:

15

Fig. 1 illustrates an exemplary cellular system arrangement that may be used according to the present invention;

Fig. 2A shows a cellular arrangement for a macro cell and a microcell;

20

Fig. 2B illustrates the relation between call load in a cell and time in a macro cell and one of its micro cells;

Fig. 3 illustrates the relation between call load in a cell and time; and

25

Fig. 4 is an exemplary block diagram of the system according to the present invention.

DETAILED DESCRIPTION

The various features of the invention will now be described with respect to the figures, in which like parts are identified with the same reference characters.

30

Referring to Fig. 1, a conventional cellular radio communication system which may be used with the present invention is illustrated. Fig. 1 shows an

geographic area divided into a plurality of contiguous radio coverage areas or cells labeled C1 through C10. Associated with each of the cells C1 through C10 is a base station designated B1 through B10. Each base station generally includes a transmitter, a receiver and a base station controller, all of which are well known in the art. It is noted that the representation of the cellular radio system according to Fig. 1 is for purposes of illustration only and is not intended as a limitation on the possible implementations of a mobile radio telecommunication system within which the Variable Charge Rate (VCR) system of the present invention may be implemented. For example, the number and size of cells could be varied along with the position of the base station relative to a cell. The VCR according to the present invention may also be used with any of the multiple access communication systems such as GSM, AMPS, D-AMPS, CDMA, or the like.

Also shown in Fig. 1 are a plurality of mobile stations M1 through M10. These mobile stations may roam from one location in the cell to another, from one cell to an adjacent cell, or even from one cellular radio system served by a mobile switching center (MSC) to another such system all while receiving and placing calls both within the cellular system as well as to and from a public switch telecommunications network (PSTN).

Each of the mobile stations M1 through M10 is capable of initiating or receiving a call through one or more of the base stations B1 through B10 in conjunction with the MSC. The MSC is connected by communication links, e.g., cables, to each of the base stations B1 through B10 and to the PSTN (not shown) of a similar fixed network which may include an integrated services digital network (ISDN) facility. According to an embodiment of the present invention, the mobile stations

supported by the system can be both VCR-mobile stations and non-VCR-mobile stations. The VCR mobile stations, base stations, and MSC are described in further detail below.

5 Fixed Charged Rates

Turning to Fig. 3 it can be seen that the available capacity of the service area sharply changes with the time of day. An example of the usage levels of a fixed rate system is shown by curve 30. By fixed rate it is meant that the same, unvarying rate is offered to everyone within the system or cell at the same time of day. Normally, demand for the system will be greatest in daylight hours, for example, between the hours of 8:00 to 18:00, the time when most people are awake and active. In addition, the majority of business is also conducted during this period of time. As the business day ends, demand by subscribers to the cellular system continually drops and system capacity increases with demand reaching its lowest in the early morning hours.

In a response to the time dependent change in demand, service providers have developed a time based charge rate for the local comlink 50 in Fig. 4. Fig. 3 illustrates this concept with three different time dependent charge rates. During the hours between 7:00 and 19:00 when demand is high, a full rate is charged to subscribers making calls. According to Fig. 3 it can be seen that the demand for the system reaches full capacity or near full capacity in mid-morning and late afternoon with a dip in capacity near mid-day, for example, when people are at lunch. As demand steadily declines beginning around 17:00, the service provider offers a cheaper rate in order to induce additional customer demand for the system. It should be noted that immediately after the cheaper rate is introduced demand

for the system increases before peaking and slowly dropping as the evening continues. Conversely in the morning when rates go up around 7:00 demand momentarily sharply drops in a fixed rate system. A second cheaper rate is offered in the early morning hours when user demand is at its lowest.

As only one fixed rate is offered at any particular time within a cell according to prior systems, some subscribers are indiscriminantly discouraged from making calls. For example, suppose a mobile station M7 in cell C1 was used by a student who wanted to make a call in the afternoon. The student may decide to not make the call because the fixed rate charged for a call at this time is too high. However, if cell C1 has unused capacity at this time, the service provider would like to be able to encourage others, such as the student, to make a call thereby using the excess capacity thereby maximizing revenue generated by the cell C1. This is accomplished according to the present invention by determining VCRs for a cell tailored to various subscriber categories. According to the present invention, the service provider can determine that there is an excess capacity in the cell C1 and further determine to offer a lower charge to a particular subscriber category located in the cell C1, such as students, and therefore encourage subscribers such as students to place a call.

By determining various VCRs for each cell over the entire service area, the service provider can maximize the use of the excess system capacity. This can be seen from the VCR curve 35 shown in Fig. 3. By providing VCRs the load on the system is increased over the entire day. In addition, there are fewer sudden drops or spikes in system demand. It should be noted that the VCR would generally be calculated for the local com link

50 shown in Fig. 4. Additional charges may have to be added, for example long distance charges, to determine a total charge rate. Further description of the VCR is provided below.

5 **Variable Charge Rates (VCRs)**

According to an exemplary embodiment of the invention, a new type of subscription is introduced. As an alternative to the conventional time of day based charge rates typically used by service providers,
10 according to the present invention, subscribers are offered a VCR. A VCR may also be set for terminating calls in systems in which subscribers also pay for call termination (e.g., in the United States). The service provider monitors the load in each cell and for each
15 cell continuously determines a specific VCR for an individual subscriber or group of subscribers, such that the overall system excess capacity is used and revenue increased. While it is possible to provide an individual VCR for each subscriber, the following description is
20 directed to VCRs for groups of subscribers based on subscriber categories.

In order to provide increased overall demand and revenue generated by the system, a number of factors other than time of day and location are used when
25 determining a specific VCR for a subscriber.

The following list, while not exhaustive, includes some of the factors which may be taken into account by the service provider when determining the VCR:

- 30 A. the load of calls charged at a variable rate in the cell (l_v);
 B. the load of calls charged at a fixed rate in the cell (l_f);

- C. the desired "safety margin", i.e., how close the load may be to congestion (m);
 - D. the total load in the switch;
 - E. the number of VCR-mobiles registered in the cell;
 - 5 F. the average power radiated by the base station;
 - G. an estimated current demand curve; and
 - H. the average co-channel disturbance caused by the cell.
- 10

Through utilization of these factors a service provider is given greater control in determining an optimum price to charge each user such that overall system usage and revenue can be maximized. Through use of the VCR the provider is no longer limited to time and location but may adjust the various factors such that prices are optimized for the specific system in question. Such optimization may be carried out through use of empirically derived estimate demand curves based on the specific area and subscriber make-up serviced by the system from the factors given above.

15

20

Subscriber Demand

According to one embodiment of the present invention an estimate demand curve is used to determine subscriber price elasticity that is in turn used to determine a VCR. The estimate demand curve is a representation of quantity (q) in relation to the price (p). The demand curve can be estimated from the service provider's records of prior system use or through measuring system use over a representative period of time. Use of the estimate demand curves allows the price elasticity of subscribers to be taken into account

25

30

unlike prior systems. The estimate demand curve may depend on various factors, such as:

- G1. the time of day;
- G2. the day of week;
- 5 G3. the time of year;
- G4. the type of district (for instance, business district, residential, industrial, or a hybrid), etc; and
- G5. the category of subscriber.

10 Estimation of a Demand Curve

For each VCR charged call, the service provider records time of day, the duration of the call, and the charge rate. The system may continuously record the charge rate and the number of VCR mobiles registered in each cell. When a sufficient amount of data has been accumulated the various demand curves can then be accurately estimated. According to one exemplary embodiment, the day could be divided into a plurality of intervals, and labelled "time of day". For each time of day and each charge rate the service provider determines the duration of all conversations of the subscribers making calls and the duration of exposure to a charge rate of the number of mobile stations registered or in conversation. For any cell, the probability of a mobile station being in conversation at a certain time of day and for a certain charge rate can be estimated. Along the same lines, the system can then estimate demand curves with respect to a plurality of factors, such as day of the week, the time of the year, the type of district, the various subscriber categories, etc. or demand curves may even be split as further described below.

For the purpose of illustrating the general principles according to one exemplary embodiment of the

invention, the following simplification has been made:
the probability of a subscriber being in conversation
does not vary due to say time of day, location, etc.

Assuming that there are r different charge
5 rates, for each charge rate the system sums up (1) the
duration of conversations, and (2) the duration of
offer, i.e., the duration that mobile stations have been
offered that charge rate (either registered in cells or
in conversation). The probability p of a mobile station
10 being in conversation at a given charge rate then can be
estimated as:

EQUATION (1)

$$\hat{p} = \frac{\sum \text{Duration of Conversation}}{\sum \text{Duration of Offer}}$$

Numerical example

Consider a system with 50 subscribers, one
15 cell, and two charge rates: \$1.5 and \$3.00. The system
is run for 10 hours, varying the charge rate. During
this time the subscribers are offered calls at \$1.50 and
\$3.00 for a duration of 6 hours and 4 hours
respectively. If it turns out that the subscribers as a
20 whole have been in conversation for 24 hours when calls
were cheap and for 6 hours when they were more
expensive, by inserting in Equation (1) the probability
of a mobile station being in conversation during the
cheap period can be estimated as being $p_{1.50} = 24 \text{ h} / (50$
25 $\times 6 \text{ h}) = 8\%$. The probability for both rates is shown in
Table 1 below.

Table 1

Charge Rate	Duration of Offer	Duration of Calls	\hat{p}
\$1.50.	300 hours	24 hours	8%

\$3.00.

200 hours

6 hours

3%

Sufficient Data

A sufficient amount of data is obtained when the estimations of p_1, \dots, p_r differ significantly. This can be determined as described below.

The example is simplified by reducing the number of charge rates to two. In addition, only the duration of the calls is taken into account, and the number of calls is disregarded.

If there are n calls at rate₁, the duration of each call could be perceived as the outcome of independent exponentially distributed random variables X_1, \dots, X_n , where the expected duration is β_1 . Likewise at rate₂: the expected duration of Y_1, \dots, Y_m , is β_2 .

Assuming $\beta_1 > \beta_2$ the test variable is:

EQUATION (2)

$$Z = \frac{\sum_{i=1}^n X_i/n}{\sum_{i=1}^m Y_i/m}$$

The test variable is used to verify that the change of call duration is caused by the change of the charge rate and not just as an accidental coincidence. The critical area of a test at significant level α is represented according to an "F" distribution as:

$$z > F(2n, 2m)_{1-\alpha}$$

where z is the observed value of the test variable Z . Therefore the duration of calls is summed up until z is in the critical area.

Numerical example

Assume, for example, that the duration of 50 random calls at \$1.50 is $\sum x_i = 9000s$; and at \$3.00 $\sum y_i =$

6400. The observed value of the test variable, according to equation 2, would be:

$$z = \frac{9000/50}{6400/50} = 1.41$$

The critical area for a test at a 5% level is $z > F(100, 100)_{.95} = 1.39$. Therefore, the hypothesis that the expected duration is the same for both charge rates can be rejected and instead it is concluded that $\beta_1 = 180s$ and $\beta_2 = 128s$.

One of skill in the art would appreciate that the above method can be generalized to include the case of a greater plurality of charge rates.

Splitting of Demand Curves

If for one reason or another it is suspected that the behavior of a subscriber category differs due to a factor, such as time of day, week, district, etc, then the general demand curve may be split into new (estimated) demand curves for the identified factor, provided that the demand curves differ significantly. Two demand curves differ significantly if and only if the probability of conversation of at least one charge rate differs significantly. For example, if a category of subscribers in New York city were professionals, a number of demand curves could be derived based on the factor of time of day. However, additional factors might govern professionals' behavior within NY. If a service provider suspected that professionals on Wall Street made a large number of calls of short duration, by isolating these calls from the rest of professionals' calls in New York, additional demand curves for Wall Street could be split from the rest of New York's professionals.

Price Elasticity

Subscriber price elasticity ϵ is the derivative of a subscriber estimated demand curve. It is defined as:

5 EQUATION (3)

$$\epsilon = \frac{\Delta q/q}{\Delta p/p}$$

where q is "quantity", i.e. load, and here p is "price", i.e., VCR. By rearranging the following equation is obtained:

EQUATION (4)

$$\Delta p = \frac{p}{q} \frac{\Delta q}{\epsilon}$$

10 In intervals where price elasticity ϵ can be considered constant the following relationship exists:
EQUATION (5)

$$q = Ap^\epsilon$$

where A is a positive constant. If the estimate demand curve is discrete, i.e. quantity q is only known for
15 finite number of values of p , then ϵ between p_i and p_{i+1} can be calculated as:

EQUATION (6)

$$\epsilon = \frac{\log(q_{i+1}) - \log(q_i)}{\log(p_{i+1}) - \log(p_i)}$$

Single Category of VCR-mobilesCongestion

20 The following is an example of how the VCR may be calculated. According to this example, a simplified case is considered where there are only two categories

of mobile stations in a cell: fixed charge rate (FCR)-mobile stations and VCR-mobile stations. The load caused by the two categories is l_f (load caused by FCR-mobile stations) and l_v (load caused by VCR-mobile stations). When $l_f + l_v = 1$ the system is congested or, in other words, at full capacity. According to the invention, only the VCR mobile stations can be influenced, therefore $q = l_v$. The change that is desired is $\Delta q = 1 - m - l_f - l_v$. Dynamically determining the VCR the $VCR_{new} = VCR_{old} + \Delta VCR$. By insertion in Equation 4, a new VCR is determined:

EQUATION (7)

$$VCR_{new} = VCR_{old} * \left(1 + \frac{(1 - m - l_v - l_f)}{l_v * \epsilon} \right)$$

Surplus capacity

As described above, when there is surplus capacity in a cell then the charge rate should be set so that the revenue is maximized. Based on economics theory one skilled in the art would appreciate that this is obtained when $|\epsilon| = 1$. When the VCR calculated according to Equation 7 reaches a level so that $|\epsilon(VCR)| = 1$ the VCR will no longer be reduced (in a simplified case where the demand curve is constant over time).

Multiple categories of VCR-mobiles

As example of multiple categories one category could be "normal private citizens", and another could be "students" (here considered more price sensitive). Both categories are attributed a specific estimate demand curve.

In the case of congestion the lowest charge rate would normally be increased (and broadcasted to the corresponding subscriber category). This charge rate

can be calculated according to Equation (7), where the load of the "affluent" subscriber category may be lumped together with the fixed rate mobiles l_f . If the two charge rates become identical, then the two categories of VCR-mobiles could be combined. The common charge rate would then be calculated according to Equation (7) and broadcasted to both categories. In contrast, when there is excess capacity the charge rates would be lowered according to subscriber category and broadcast to the corresponding subscribers.

System Applications

The VCR may be determined in real time by the service provider. This can be implemented in a number of ways. For example, the determination can be made at the MSC or other central location within the service provider by any calculation means, such as a computer or processor, for instance. In an alternative embodiment, calculation of the charge rate could be decentralized, for example, by allowing the MSC to inform the base stations of a minimum acceptable charge rate, but otherwise let the base stations calculate the VCR and then broadcast it. According to this exemplary embodiment the VCRs would be calculated by a computer or processor located at each base station.

Another embodiment of the invention will now be discussed in conjunction with Fig. 4. Once a VCR has been determined (either centrally or at the base station), the VCR is then broadcast from a base station 62 from its antenna 65 over communications channels 50 where it is received by the antennas 45 of any registered mobile stations 40. The service provider 60 would have at least one mobile switching center 64 linked to a PSTN 70, as is conventional. According to the present invention the mobile stations 40 may refer

to any information or communication device that may be used to communicate information, for example, a fixed wire telephone, a cellular phone, facsimile receiver, modem, computer or other communication means. The VCR
5 could then be displayed on a display 42, for example, at the mobile unit 40 for the subscriber.

The VCR could be transmitted to the mobile stations in many different ways. According to one embodiment the VCR could be broadcast to the mobiles
10 stations 40 using the user group short message service (SMS) as provided in the (D)-AMPS system. According to this embodiment there could be a special user group for each subscriber category associated with the VCR mobile stations 40, so that other mobile stations are not
15 inadvertently informed. It follows that all system users do not have to belong to a VCR subscriber category. Of course, as the number of VCR mobile stations increases, the greater the overall demand control and revenue generated becomes.

Alternatively, according to another embodiment, an existing message (such as the system identity message described in EIA standard IS-136.1
20 6.4.1.1.1.5) on the forward control channel (CC) could have a new information element added indicating current VCRs in a cell. Another embodiment would be to send the VCRs individually to each mobile station using point-to-point short message services (SMS). Alternatively, a
25 new message containing an information element indicating current VCRs in a cell could be added, or, an existing information element in an existing message, e.g.,
30 "display" in registration accept could be used to convey the VCR as provided in IS-136 6.4.3.14. According to another exemplary embodiment of the invention the VCRs broadcast could be repeated either intermittently or at

regular predefined intervals. However, in all cases the VCR should be broadcast whenever it changes.

When a mobile station 40 not in conversation is registered in one cell and then moves to a neighboring cell, the mobile station will register in the new cell, via channel re-allocation, as known by those skilled in the art. If the new cell has a different VCR for the subscriber the mobile station 40 should be informed as soon as possible. The simplest method of informing the subscriber of the new rate would be to use the information element "display" in the registration accept, of course any of the alternative methods described above could also be used. When the mobile station 40 performs its initial registration the same information element could be used; however, several of the methods described above could also be used.

If during a conversation a mobile station 40 is handed off to another cell a service provider 60 could then send a message to the mobile station 40 informing that the VCR will be changed after a predefined period, and what the future VCR will be. The decision to change the VCR could depend on a plurality of factors, such as the difference between the current VCR and the potential future VCR, the subscriber category, the individual subscriber, the load situation, etc. Similarly, the mobile station could also alert the subscriber if the VCR changes during a conversation allowing the subscriber to determine if they wish to continue the call at the new rate. The mobile station could provide the alert either visually or audibly.

According to another embodiment the mobile stations 40 could continuously read the relevant broadcast message and display the current VCR of the cell for the associated subscriber. Additionally the mobile station 40 could alert the subscriber when the

VCR drops below a predetermined threshold entered by the user through a user interface in the mobile station (e.g., key pad 44). The alert could be provided either visually or audibly through an additional circuit or processor included at the mobile station which would determine when a VCR has dropped below the predetermined threshold. Alternatively, the service provider could determine when the VCR is below the threshold and alert the mobile stations. According to this embodiment the subscriber could inform the service provider of his threshold (e.g., by submitting an SMS message).

The display 42 at the mobile unit 40 could be of any type able to display human readable characters, (e.g., LCD, LED, etc.) Alternatively, the present invention could be practiced on mobile units 40 without displays 42 by allowing a subscriber to receive a broadcast audio message conveying the current VCR to the mobile station 40.

In situations where a device, such as a telefax or computer, needs to react to a VCR the VCR can be broadcasted in machine-readable form. For example, the charge rate could be converted to a string of ASCII characters that are formatted according to a standard so that the VCR may be understood by machine as well as humans. Alternatively, the VCR could be coded as a binary string. In cases where the mobile station has a display the mobile station could translate the binary string to ASCII characters and then display it.

In yet another embodiment according to the present invention, the initiating subscriber could actively enter a number to which the user desires to be connected via keypad 44. Accordingly, the calling mobile station 40 transfers the desired phone number being called via comlink 50 to the service provider 60 through the base station 62. The service provider 60

could then determine a VCR, add any additional charges necessary, for example for long distance, and transfer the total charge rate information back to the mobile station 40 via the comlink 50. The total charge rate information is indicated to the mobile station via the display 42 or other means as described above. The subscriber could then be given the option to actually place the call. Any number of means could also be used to alert the user to the arrival of such a message, such as a flashing light, highlighted display, tone, etc.

According to the present invention, many further enhancements and refinements of the charge function can also be introduced. As described above, a plurality of subscription categories designed for specific customers possessing unusual price elasticity (for instance such as students, businessmen, according to household income, etc.) could be formed. Charge rate policies could then be tailored for each category and broadcast accordingly. Estimate demand curves would then be determined for each identified category. As described above in the example for splitting of demand curves, the categories may depend on the area, and sub-area where the service provider is located as described in the Wall Street demand curve. Alternatively, in certain areas there may be a concentration of one or more existing subscriber categories, (e.g., students and teachers on a university campus). In this situation the service provider could merely use the existing estimated demand curves for these groups instead of determining new ones.

According to the present invention, with expedient setting of parameters the system will virtually never become congested simply because as traffic increases, the price of a call will go up until a given number of subscribers are priced out of making a call. In order to know where to increase system

capacity, for example by splitting cells or adding
micro-cells, the service provider 60 may estimate and
record the potential load in the cells, in other words,
what the load would have been if the VCR had to be set
5 to a certain value.

The present invention has been described by
way of example, and modifications and variations of the
exemplary embodiments will suggest themselves to skilled
artisans in this field without departing from the spirit
10 of the invention. The preferred embodiments are merely
illus-trative and should not be considered restrictive
in any way. The scope of the invention is to be
measured by the appended claims, rather than the
preceding description, and all variations and
15 equivalents which fall within the range of the claims
are intended to be embraced therein.

What is claimed is:

1. A communications system servicing a plurality of subscribers comprising:
 - at least one base station in a cell for
 - 5 communicating with a plurality of mobile stations;
 - a mobile station capable of communicating to and receiving calls from the at least one base station, including a display for displaying a current charge rate received from the at least one base station, wherein the
 - 10 current charge rate is based on subscriber price elasticity.
2. The system according to claim 1 wherein the current charge rate is additionally based on a call load within the system.
- 15 3. The system according to claim 2 further comprising:
 - a processor for determining the current charge rate.
4. The system of claim 1 wherein the current
- 20 charge rate is based on a current call load within a cell where the mobile station is located.
5. The system of claim 4 wherein the processor determines the current charge rate based on at least one of the factors of: the number of calls in a cell charged
- 25 at a variable charge rate, the number of calls in a cell charged at a fixed charge rate, and the total number of calls handled by the system.
6. The system of claim 5 wherein the current charge rate includes a safety margin of how close to
- 30 congestion the current call load may be.

7. The system of claim 1 wherein the subscriber price elasticity is determined from demand curves.

8. The system of claim 7 wherein the demand curves are communication demand curves.

5 9. The system of claim 7 wherein the demand curve is determined based on at least one of the factors of time of day, day of week, time of year, type of district, and category of subscribers.

10 10. The system of claim 7 wherein the demand curve is determined based on the factors of time of day, day of week, time of year, type of district, and category of subscribers.

15 11. The system of claim 1 wherein the current charge rate is determined based upon a request received from the mobile station and then the current charge rate is transmitted to the mobile station.

12. The system of claim 1 wherein the current charge rate is transmitted to the mobile station from the base station.

20 13. The system of claim 1 wherein the subscribers are divided into subscribers categories based on price elasticity.

25 14. A method for optimizing use of the capacity of a radio communications system including a plurality of cells and servicing a plurality of subscribers, each cell including at least one base station capable of communicating with a plurality of mobile stations, and

means for continuously monitoring the call load of each cell, the method comprising the steps of:

- monitoring the current call load of each cell;
- determining a plurality of charge rates based
- 5 on price elasticities of the subscribers.

15. A method according to claim 14 wherein the current charge rate is additionally based on the current call load in a system.

- 16. A method according to claim 14 wherein the
- 10 current charge rate is additionally based on a current call load of within a cell.

- 17. The method of either claim 15 or 16 further comprising the step of broadcasting the plurality of charge rates to a plurality of mobile stations in a
- 15 cell, wherein each charge rate is broadcast to a subset of the plurality of subscribers wherein the subset is based on a subscriber category.

18. The method of claim 14 wherein price elasticity is determined from subscriber demand curves.

- 20 19. The method of claim 18 wherein the demand curves are based on a history of charge rates in every cell, a history of the number of mobiles registered in every cell, and a history based on categories of subscribers using the system.

- 25 20. The method of claim 14, wherein the current charge rate is based on the current call load within a cell where the mobile station is located.

FIG. 1

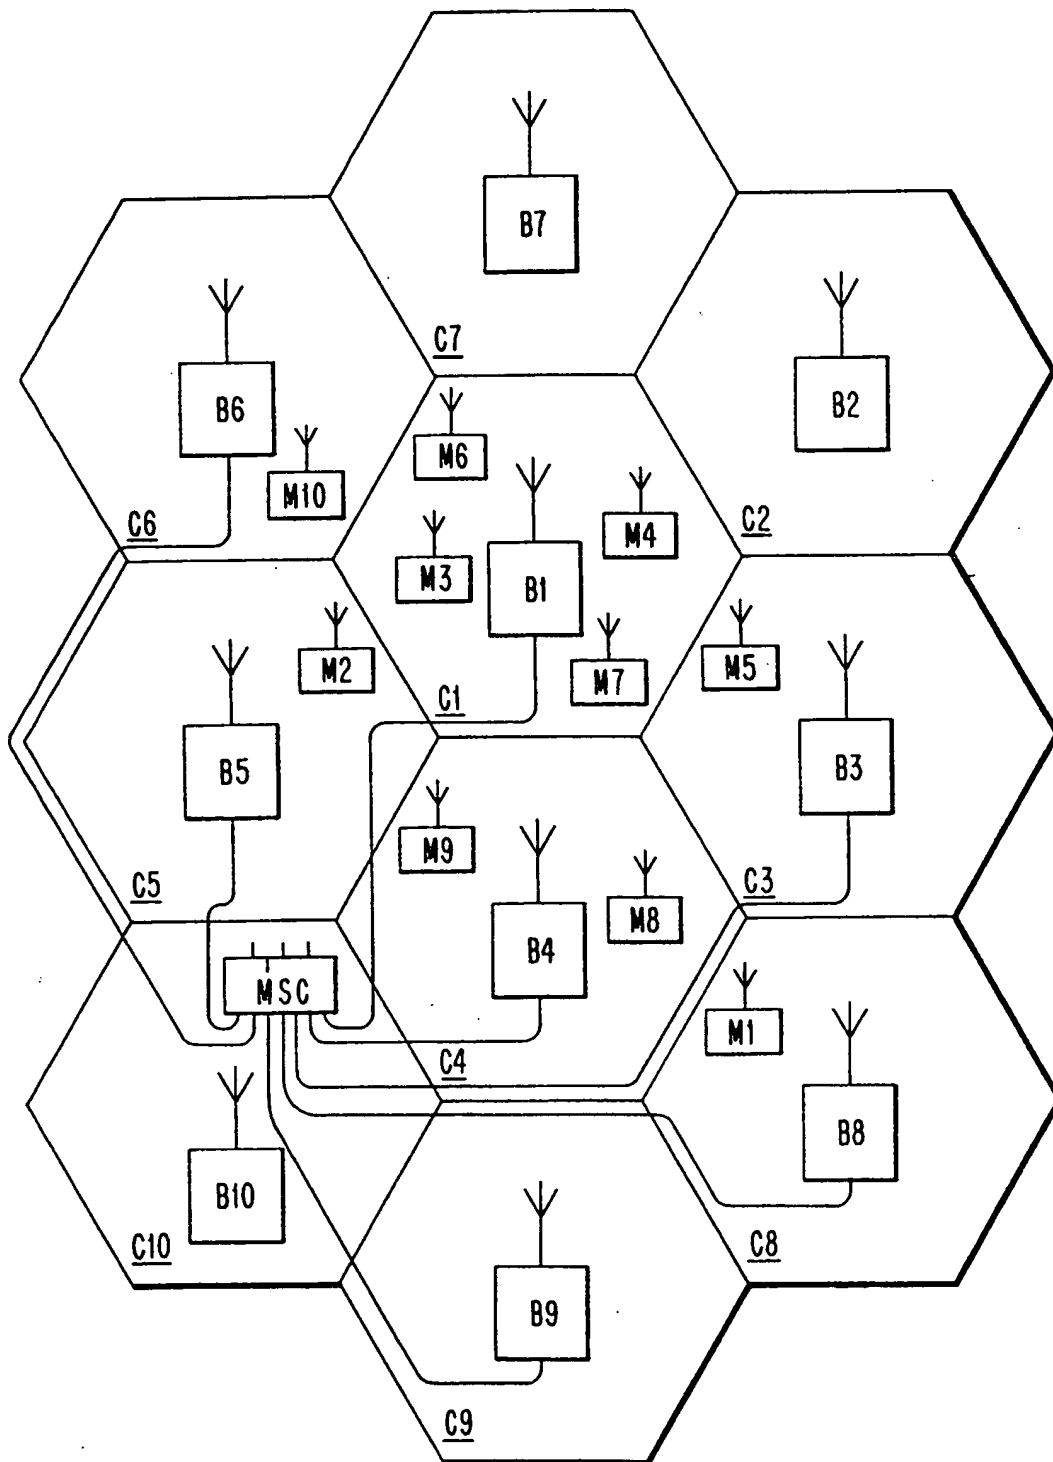


FIG. 2A

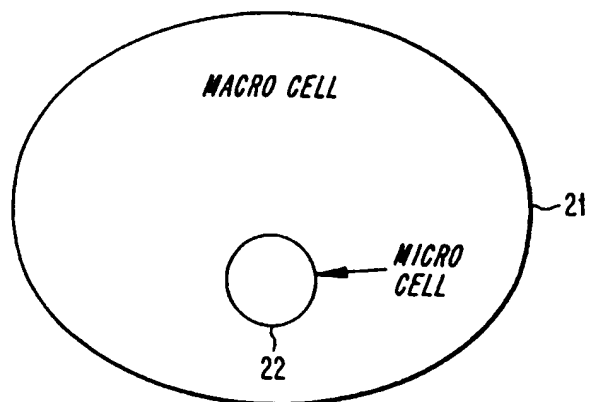
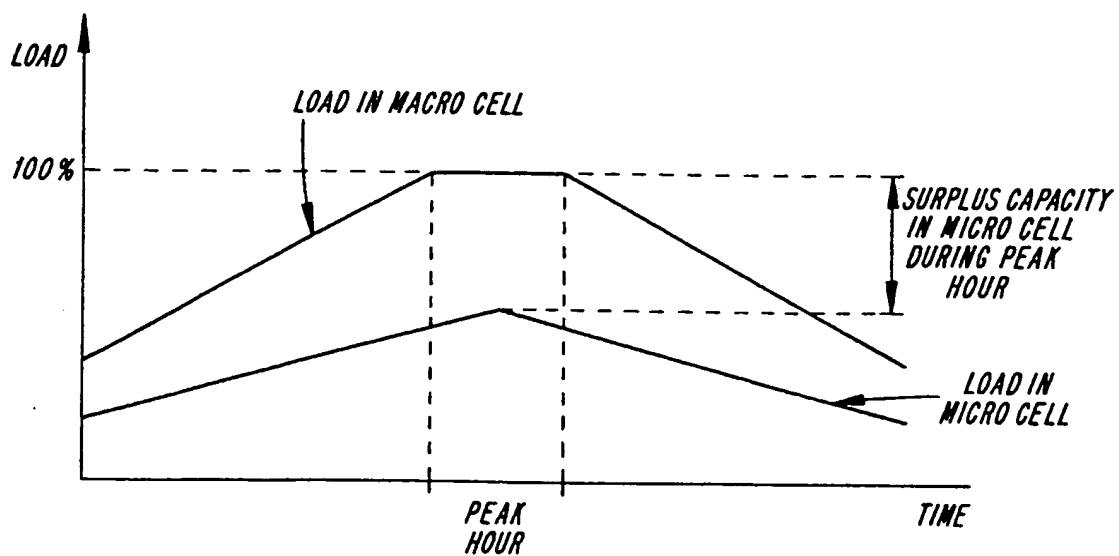


FIG. 2B



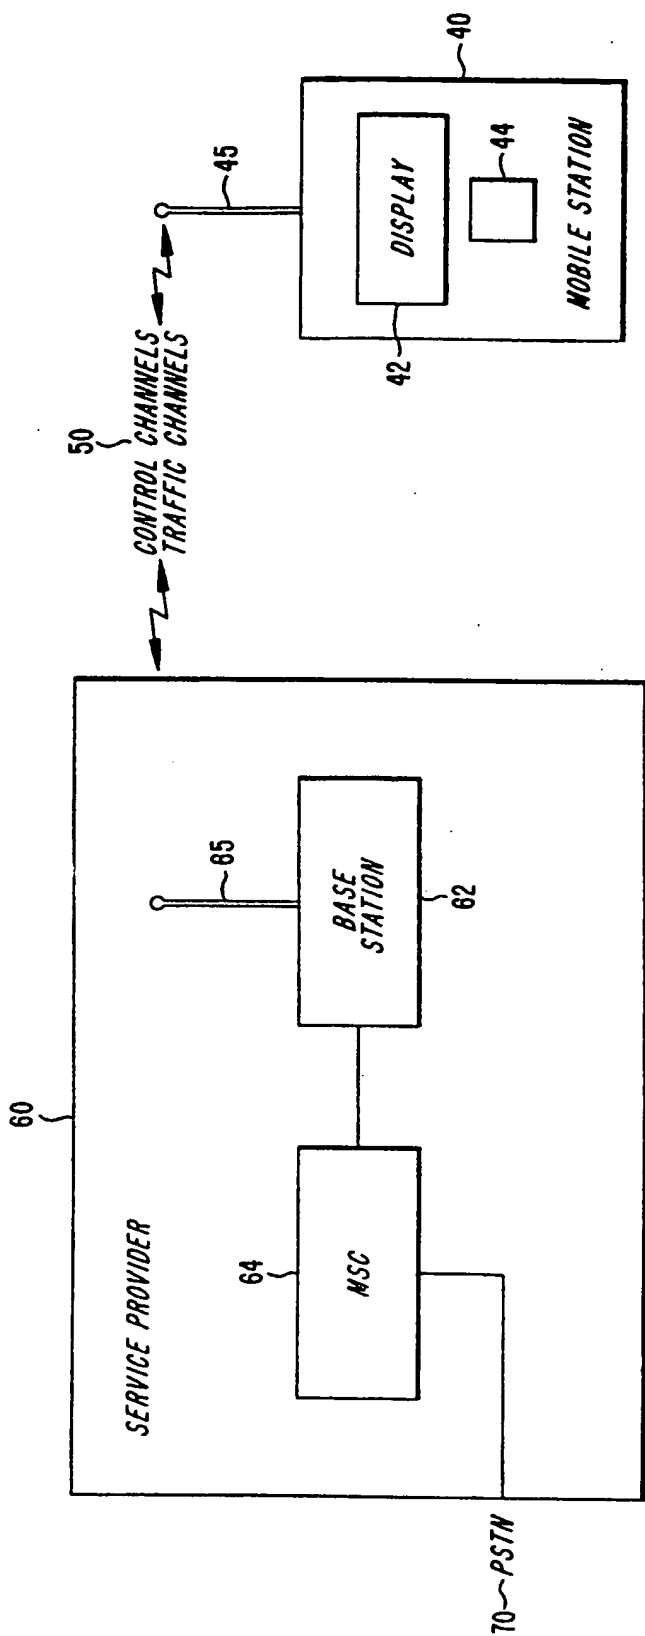


FIG. 4